

HAN-8360B

High Performance 2U Rackmount Server
Appliance With Intel® Xeon® Processor Scalable
Family (Sapphire Rapids-SP) & Emmisburg PCH



Images are for reference only and
manufacturer keeps rights to change without notice

■ Features

- Intel® Sapphire Rapids-SP & Emmisburg PCH
- 2x 2.5GbE RJ45, 1x RJ45 Console, 2 x NIC Slots Modules
- Max. 768GB RAM
- 2x USB 3.0
- 8x 2.5" HDD/SSD bay hot swap and 2x microSD/SD (optional)
- 1x M.2 (SATA) 2280 B+M Key, 2x M.2 NVMe (PCIe)
- 1x PCI-E*8 FH/H
- Intel® QuickAssist Technology


■ Specifications

Platform	
Form Factor	2U 19" Rackmount
Processor Options	Intel® Xeon® Processor Scalable Family (Sapphire Rapids-SP)
CPU Socket	1x LGA 4677
Chipset	Intel® Emmisburg PCH
Security Acceleration	Intel® QuickAssist Technology
BIOS	AMI SPI Flash BIOS
System Memory	
Technology	DDR4 or newer speed upto 4400MHz
Max. Capacity	768GB
Socket	12x 288-pin DIMM
Networking	
Ethernet Ports	2x 2.5GbE RJ45 With LED Dual MGT By Intel® I226-LM
Bypass	Based on request
NIC Module Slot	2x NIC module up to 16 port GbE
Light Out Management	
IO Interface	Yes, 1x LOM Port (Via BMC Chip)
OPMA Slot	Yes (Support IPMI 2.0 standard)
I/O Interface	
Reset Button	1
LED	Power/Status/Storage
Power Button	1x ATX Power Switch
Console	1x RJ45
USB	2x USB 3.0
LCD Module	4 x Keypads, 16x2 Character LCD for system info and debug
Display	VGA
Power Input	AC Power Inlet On PSU
Storage	


HDD/SSD Support	8x 2.5" HDD/SSD hotswap up to 128TB (based on capacity of installed disk)
Onboard Slots	1x M.2 (SATA) 2280 B+M Key 2x M.2 NVMe (PCIe) 2280 M Key
Expansion	
PCIe	1x PCI-E*8 FH/HL
SD/micro SD (optional)	2x micro SD/SD support 16/32/64 GB
System	
Security	Silicon root of trust, Secure Boot Secure Erase, Security using TSL 1.3 over HTTPS
Remote management	Integrated Remote Access Controller (memory 1024 MB)
Cooling	
Processor	Passive CPU Heatsink
System	4x Smart Fans
Environmental Parameters	
Anti-Vibration	3Hz~5Hz
Temperature	0~40°C Operating
Humidity	5~90% Operating
System Dimensions	
(WxDxH)	438 x 650 x 88 mm
Weight	24 kg
Operating system	
Windows Server	2012/2012R/2016/2019
Linux kernel 4.19.x or higher	Red Hat/SUSE/Ubuntu/Debian/Centos
Power	
Type / Watts	1x 1300W CRPS AC PSU (Default) 2x 1600W CRPS AC PSU (By Request)
Input	AC 115V-240V, 50/60Hz
Certification	
Approvals and Compliance	RoHS, CE/FCC Class A, UKCA, UL

■ Product I/O View

Images are for reference only and
manufacturer keeps rights to change without notice

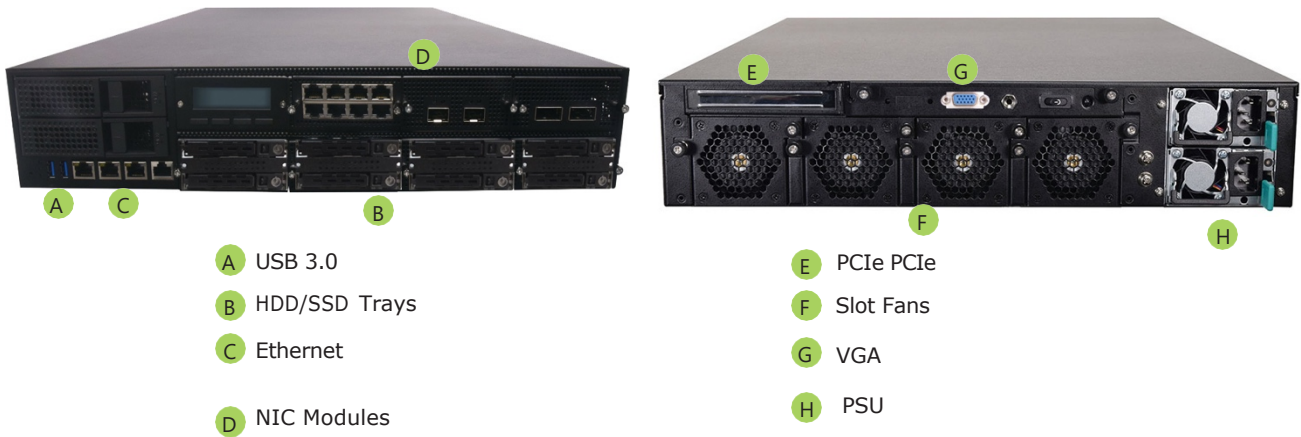

■ Dimensions (WxDxH) 438 x 650 x 88 mm

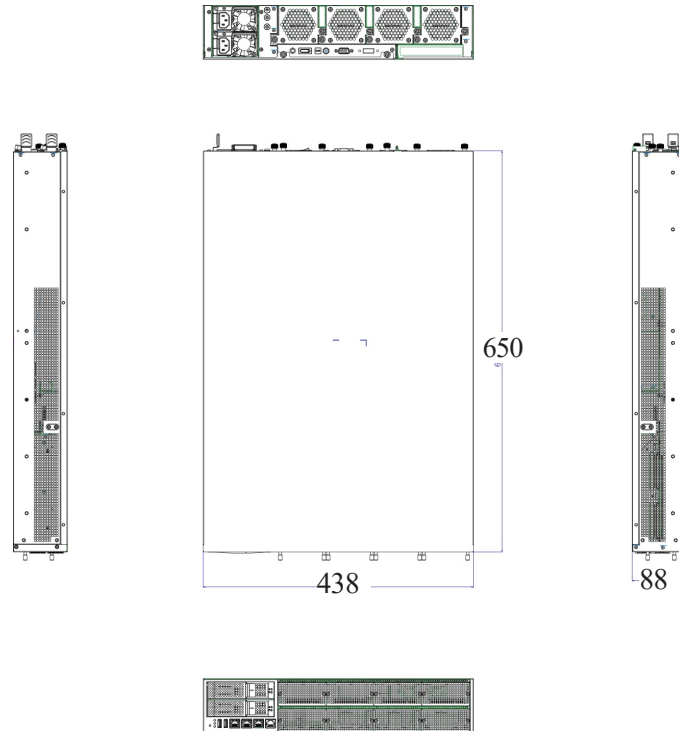

HAN-8360B

V1-2023.09.14

Lanner

© Lanner Electronics Inc. All rights reserved. All
product specifications are subject to change without notice.
connect@lannerinc.com | www.lannerinc.com