

NCA-6 | 20

2U 19" Rackmount Network Appliance With AMD EPYC™ 7000 Series, Up To 64C/128T



Images are for reference only. See ordering information for SKU details.

■ Features

- AMD EPYC 7000 Series, w/ Support For Milan & Rome (64C/128T)
- 16x 288-pin DIMM, Max. 1024GB DDR4 3200MHz ECC R-DIMM
- 1x GbE RJ45 Intel® i210, 1x RJ45 Console, Max. 8x NIC Slots
- Max. 4x 3.5" or 2.5" Swappable Bays, 2 x PCIe*8 FHHL or 1 x PCIe*16 FHFL

■ Specifications

Platform	
Form Factor	2U 19" Rackmount
Processor Options	AMD EPYC 7000 Series With Support For Milan & Rome (64C/128T)
CPU Socket	SP3
Chipset	N/A
Security Acceleration	40Gbps Encryption + 40Gbps Decryption
BIOS	AMI SPI Flash BIOS
System Memory	
Technology	DDR4 3200MHz ECC REG DIMM
Max. Capacity	1024GB
Socket	16x 288-pin DIMM
Networking	
Ethernet Ports	1 x GbE RJ45 Intel® i210
Bypass	N/A
NIC Module Slot	8 or 4 (by SKU)
LOM	
IO Interface	1 x RJ45
OPMA Slot	Yes
I/O Interface	
Reset Button	1
LED	Power/Status/Storage
Power Button	1 x ATX Power Switch
Console	1 x RJ45
USB	2 x USB 3.0
LCD Module	N/A
Display	1x VGA (Optional)
Power Input	AC Power Inlet on PSU
Storage	
HDD/SSD Support	4 x 3.5" / 2.5" or 2 x 3.5"/2.5" Swappable Bays
Onboard Slots	1 x M.2 (SATA/PCIe) 2280

Expansion	
PCIe	2 x PCIe*8 FHHL or 1 x PCIe*16 FHFL
Miscellaneous	
Watchdog	Yes
Internal RTC with Li Battery	Yes
TPM	Yes (Optional)
Cooling	
Processor	Passive CPU Heatsink
System	4 x Individual Hot-swappable Cooling Fans
Environmental Parameters	
Temperature	0~40°C Operating -20~70°C Non-Operating
Humidity (RH)	5~90% Operating 5~95% Non-Operating
System Dimensions	
(WxDxH)	438 x 600 x 88 mm
Weight	24 kg
Package Dimensions	
(WxDxH)	825 x 600 x 270 mm
Weight	26 kg
Power	
Type / Watts	850W 1+1 ATX Redundant PSUs
Input	AC 100V~240V @47~63Hz
Certification	
Approvals and Compliance	RoHS, CE/FCC, UL

■ Product I/O View

Images are for reference only. See ordering information for SKU details.



A 4x or 2x 3.5"/2.5" HDD/SSD Bays

B Reset Button

C LED

D USB 3.0

E Management Port & Console Port


F 8x or 4x NIC Modules

G On/Off Switch

H 4x Hot-swappable Cooling Fans

I Redundant PSUs

■ Dimensions (WxDxH): 438 x 600 x 88 mm

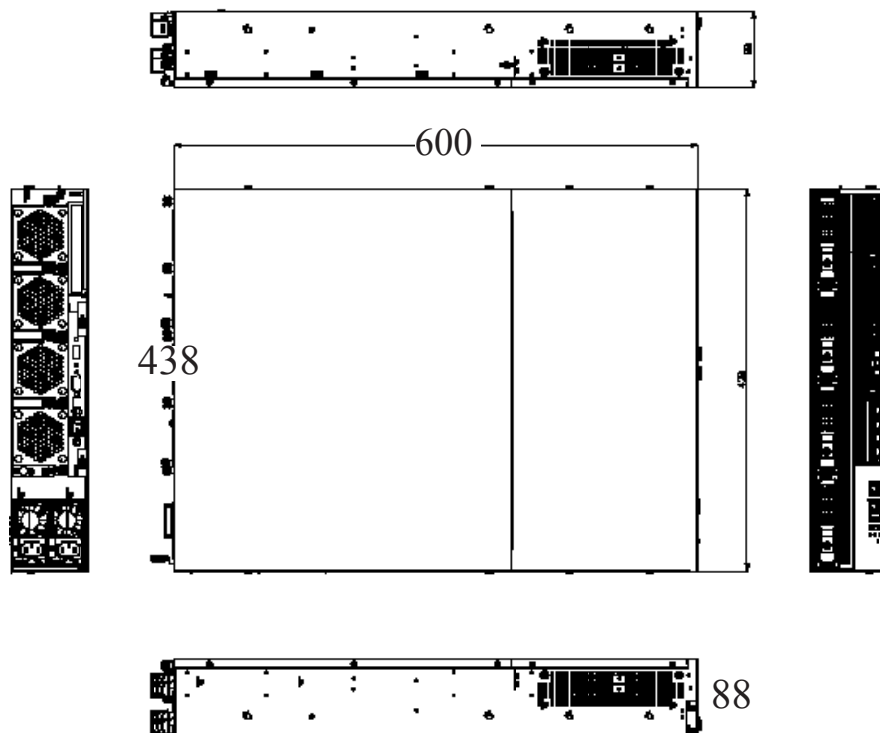

■ Ordering Information

NCA-6120A AMD EYPC 7000 Series, up to 64C128T, 2x GbE RJ45, 4x NIC Module Slots, 1x RJ45 Console, 4x 3.5" / 2.5" HDD/SSD

NCA-6120B AMD EYPC 7000 Series, up to 64C128T, 2x GbE RJ45, 8x NIC Module Slots, 1x RJ45 Console, 2x 3.5" / 2.5" HDD/SSD

V1-2022.09.23

Lanner

© Lanner Electronics Inc. All rights reserved.

All product specifications are subject to change without notice.

contact@lannerinc.com | www.lannerinc.com